

STANLEY®



EMERGENCY RESCUE HARDWARE

Emergency Rescue Hardware

dormakaba 

Trusted experts. Proven reliability. Simply STANLEY.


Emergency Rescue Hardware

For a variety of door applications including patient rooms in hospitals, institutions, and convalescent homes to private baths. Permits doors to normally swing into the bath, thus saving space, yet swing out into the bedroom, in case of emergency when a patient is trapped inside. Stanley hospital rescue hardware is composed of a Stanley DAP-3 (Double acting pivot), ES-1 (Emergency Door Stop), and DLS-1 or DSL-2 (Double Lipped Strike).

Double Acting Pivot


DAP-3 – (ANSI A2742) – Brass and malleable iron – standard finishes

- Heavy duty pivot assembly for commercial double acting interior doors of average frequency use, weighing up to 135 lbs. (61 Kg) and not exceeding 3' (91 mm) in width
- For 1 3/8" (35 mm) and 1 3/4" (44 mm) thick doors
- Header plate has a walking beam design to simplify door installation
- Extra heavy 1/4" (6.35 mm) thick solid brass frame plates
- Oil impregnated bronze bearing in top door plate
- Smooth acting ball bearing assembly in bottom door plate
- For door undercuts in 1/16" (1.6 mm) increments from 3/4" (19 mm) to 1" (25 mm)
- Bottom bracket is frame mounted and must be floor supported
- The recommended positioning of the door is to inset it 1/8" (3.2 mm) from the bathroom face of the frame

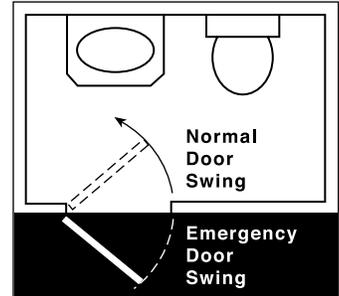

Specifications

- Pivot point 1 1/4" (31.8 mm) from jamb
- Header plate (brass) – 4 7/8" x 7/8" x 1/4" (124 mm x 22 mm x 6.4 mm)
- Top door plate (malleable iron) – 4 3/8" x 1" x 1/4" (111 mm x 25.4 mm x 6.4 mm)
- Bottom jamb bracket (brass) – 3" x 1 1/4" x 1/4" (76 mm x 32 mm x 6.4 mm)
- Bottom door plate (malleable iron) – 4 3/8" x 1" x 1/4" (111 mm x 25.4 mm x 6.4 mm)

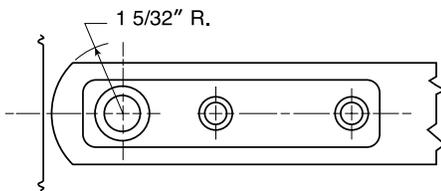

Radius on pivot side of door



Flat Head Screws Per Piece	Sets Per Box	Sets Per Case	Weight	
			Lbs.	(Kg)
4-14 x 1 1/2 wood screws	1	20	37	(17)
5-1/4-20 x 1/2 machine screws				

Emergency Rescue Hardware

Emergency Door Stop

ES-1 – (ANSI A1882) – Extruded and cast brass – standard finishes

- For converting double acting doors to single acting doors
- Emergency release allows door to swing open in opposite direction to reach ill patients who fall and block normal path of door
- Stop release resets automatically. Spring action stop, with finger-tip release, using pullman-type latch bolt with rubber bumper insert
- Refer to template for door clearance


Specifications

- Surface plate – 4 1/2" x 1 5/8" (114 mm x 41 mm) bolt height 2" (51 mm)
- Case – 2 1/8" x 1 5/16" (54 mm x 33 mm)

Flat Head Screws Per Piece	Pieces Per Box	Pieces Per Case	Weight	
			Lbs.	(Kg)
4-12-24 x 1/2 brass machine screws	1	30	17	(8)




ES-1

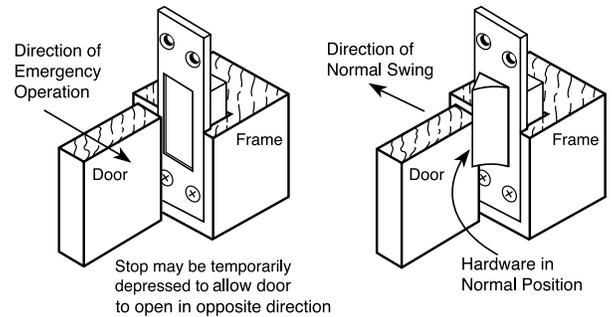

Holdback for ES-1

HB-1 – Steel – standard finishes

- Used with ES-1 to allow doors to become double acting by holding emergency stop in depressed position
- Attaches to surface plate of ES-1
- Packed one in envelope with mounting instructions

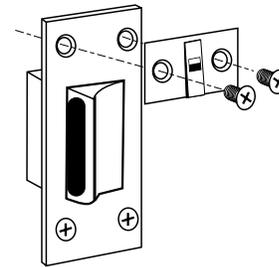

Double Lipped Strikes

DLS-1 – For 1/8" (3.2 mm) Inset hung doors – Brass – standard finishes

DLS-2 – For center hung doors – Brass – standard finishes

- Allows center hung doors to be opened in both directions without damage to frame
- Available for 5 3/4" (146 mm) cased openings
- Latch bolt cut out is 1 1/4" x 11/16" (32 mm x 17.5 mm) ANSI standard for Heavy Duty bored type locks.
- For mortise locks consult factory.
- .093" (2.4 mm) material



DLS-1



DLS-2

DLS- & DLS-2	Flat Head Screws Per Piece	Pieces Per Box	Pieces Per Case	Weight	
				Lbs.	(Kg)
	8-32 x 1/2 brass machine screws	1	50	30	(13.6)

STANLEY®

6161 East 75th Street
Indianapolis, IN 46250 USA

Phone 855-365-2407

stanleyhardwarefordoors.com

SAH014 Rev10/29/2018
© 2018 dormakaba USA Inc. All rights reserved.

© 2018 Stanley Black & Decker, Inc. STANLEY® and the STANLEY® Notched Rectangle logo are registered trademarks of Stanley Black & Decker Inc. or one of its affiliates, and are used under license

dormakaba 

dormakaba.com