


## Pre-EPT Prepped Continuous Hinges



### **Reduced lead time, quicker installation.**

STANLEY now offers some of our most popular continuous hinges pre-prepped. Like all STANLEY hinges, our Aluminum Geared and Stainless Steel Pin and Barrel Continuous Hinges use high-quality materials and precision engineering to perform smoothly in heavy-duty applications. Our pre-prepped hinges are offered with either the EPT-2 or EPT-5 profile at a reduced lead time to meet your installation needs.

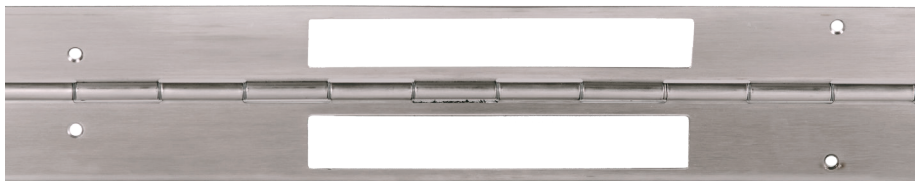

## Pre-prepped and fully customizable.

Our most popular sizes of continuous hinges are available and in-stock pre-prepped for your electronic power transfer needs. If needed, STANLEY can also customize by cutting to length or adding features such as hospital tips, fire pins, concealed electric wires, and concealed switch.

### Pre-EPT Prepped Continuous Hinges Specifications

<b>Certifications</b>	651 Continuous Hinge: ANSI/BHMA Standard A51011B and A51021B; UL- and ULC-certified to UL10C standard; 3-hour fire rating 652 Continuous Hinge: ANSI/BHMA Standard A51011B and A51021B; UL- and ULC-certified to UL10C standard; 3-hour fire rating 661HD Continuous Hinge: ANSI/BHMA Standard A156-26-1996 Grade 1; UL- and ULC-certified to UL10C standard; Standard 90-minute fire rating or 3-hour fire rating with fire pin (FP) option 662HD Continuous Hinge: ANSI/BHMA Standard A156-26-1996 Grade 1; UL- and ULC-certified to UL10C standard; Standard 90-minute fire rating or 3-hour fire rating with fire pin (FP) option
<b>Warranties</b>	Limited lifetime warranty

EDP#	Description	Finish	EPT Prep Location
477832	661HD 83 FM HINGE AL EPT 2	AL	36" from bottom of hinge
477833	661HD 83 FM HINGE AL EPT 5 LH	AL	36" from bottom of hinge
477834	661HD 83 FM HINGE AL EPT 5 RH	AL	36" from bottom of hinge
477835	662HD 83 FM HINGE 3/32 INST AL EPT 2 LH	AL	36" from bottom of hinge
477836	662HD 83 FM HINGE 3/32 INST AL EPT 2 RH	AL	36" from bottom of hinge
477837	662HD 83 FM HINGE 3/32 INST AL EPT 5 LH	AL	36" from bottom of hinge
477838	662HD 83FM HINGE 3/32 INST AL EPT 5 RH	AL	36" from bottom of hinge
477839	662HD 95FM HINGE 3/32 INST AL EPT 2 LH	AL	36" from bottom of hinge
477840	662HD 95FM HINGE 3/32 INST AL EPT 2 RH	AL	36" from bottom of hinge
477841	662HD 95FM HINGE 3/32 INST AL EPT 5 LH	AL	36" from bottom of hinge
477842	662HD 95FM HINGE 3/32 INST AL EPT 5 RH	AL	36" from bottom of hinge
477843	661HD 95FM HINGE AL EPT 2 LH	AL	36" from bottom of hinge
477844	661HD 95FM HINGE AL EPT 2 RH	AL	36" from bottom of hinge
477845	661HD 95FM HINGE AL EPT 5 LH	AL	36" from bottom of hinge
477846	661HD 95FM HINGE AL EPT 5 RH	AL	36" from bottom of hinge
161137	651 UL FM HINGE 7 FT 32D STS EPT 2	32D	39.5" from bottom to center line
161138	651 UL FM HINGE 7 FT 32D STS EPT 5 LH	32D	39.5" from bottom to center line
161139	651 UL FM HINGE 7 FT 32D STS EPT 5 RH	32D	39.5" from bottom to center line
161140	652 UL STS FM HINGE 7 FT 32D EPT 2 LH	32D	39.5" from bottom to center line
161141	652 UL STS FM HINGE 7 FT 32D EPT 2 RH	32D	39.5" from bottom to center line
161142	652 UL STS FM HINGE 7 FT 32D EPT 5 LH	32D	39.5" from bottom to center line
161143	652 UL STS FM HINGE 7 FT 32D EPT 5 RH	32D	39.5" from bottom to center line

### Features

#### 661HD and 662HD Features

- **Reduced installation time.** Ready to ship pre-prepped with an EPT-2 or EPT-5 profile.
- **Maximum durability.** Engineered with polymer PTFE bearings, 661HD and 662HD hinges are designed to perform smoothly for the life of the building.
- **Premium performance.** Designed to perform flawlessly in even the most heavy-duty applications, 661HD and 662HD hinges deliver reliable results.

#### 651 and 652 Features

- **Superior design.** With a bearing design that inhibits dirt collection and the addition of two stainless steel bearings to prevent door sagging in the event of a fire, 651 and 652 hinges are designed to perform better in a wider variety of applications and conditions.
- **Low maintenance.** Except for the stainless steel top and bottom bearings, all other knuckles of 651 and 652 hinges include twin nylon self-lubricating bearings.
- **Smooth performance.** Furnished with Nylatron bearings to provide longer life and smoother operation.



AL

32D

Get the hinges you need faster and ready to fit your EPT prep with STANLEY pre-prepped continuous hinges.